


Product Description

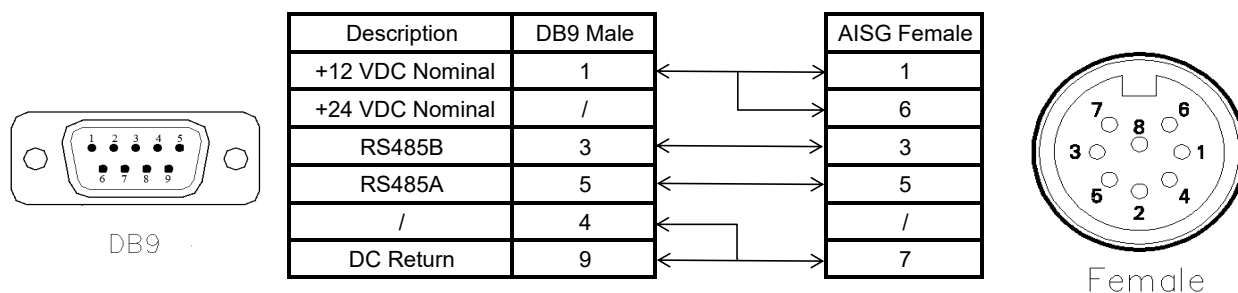

Electrical Specifications

Rated voltage	300V AC
Rated impulse withstand voltage	500V
Current rating	5A at 50°C
Insulation resistance	>100MΩ
Contact resistance	<5mΩ

Environmental & Mechanical Specifications

Mechanical operation	500cycles
Insertion and withdrawal forces	40N
IP-degree	IP68 at mating

Others Characteristics

Temperature Range	-40°C to +85°C
Cable	PU
Injection material	PE
Jacket O.D.	7.2mm
Length	0.5m/1.0m/2.0m/3.0m/5.0m/10.0m/20.0m /30.0m/40.0m/50.0m/70.0m/100.0m

The facts and figures contained herein are carefully complied to the best of our knowledge, but they are intended for general informational purposes only.