


4310M-1/2H

CO120005-3.8 Rev: A0

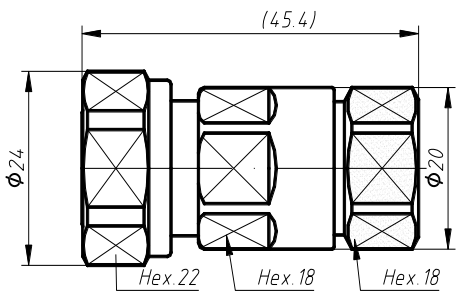

4.3-10 Straight male Connector for
1/2" Super Flexible RF Cable
ID: 8000001275(02L)
CO120005 Rev: A0

*The above picture is only for reference, we may change the appearance design in order to enhance performance without notification.

Product Description

Inner Conductor	Tin Bronze / Silver Plating
Outer Conductor & Body	Brass / Trimetal Plating
Insulator	PTFE/TPX
Gasket	Silicon Rubber
Nut	Brass/Trimetal Plating

Electrical Specifications

Characteristics Impedance	50 Ohm
Interface Frequency Range	DC~6.0GHz
Insulation Resistance	≥5000MΩ
Dielectric Withstanding Voltage	2500V rms
Operating Voltage	1400V rms
Center contact resistance	≤1.0 mΩ
Outer contact resistance	≤0.6 mΩ
Insertion Loss	@DC-3.8 GHz ≤0.10dB
VSWR	@0.8-1.0 GHz ≤1.08
	@1.7-2.7 GHz ≤1.10
	@3.0-3.8 GHz ≤1.15
PIM3 (2*43dBm)	@1800MHz ≤-160dBc

Environmental & Mechanical Specifications

Durability (matings)	≥500 cycles
Mechanical Shock Test Method	MIL-STD-202, Method 213, Test Condition D
Vibration Test Method	MIL-STD-202, Meth. 204, Cond. A
Temperature Range	-45°C to +85°C
RoHS	Compliant
Sealing Class	IP68 24hr, 1m, 20°C

Regulatory Compliance / Certification

ISO 9001:2015	Compliant
---------------	-----------

The facts and figures contained herein are carefully complied to the best of our knowledge, but they are intended for general informational purposes only.